


ATTENTION !!!

We have included small Donut shaped seals and better screws for your light.


Please use the donut shaped o-rings on the inside of your light along with the Tapered Head screws. You may discard of the Round Head screws. You should still use the round seals on top of the screws after tightening the top.

1. Please use the Donut shaped O-rings on the INSIDE of our EZ Dock Lite TOP: They will help ensure best sealing possible.

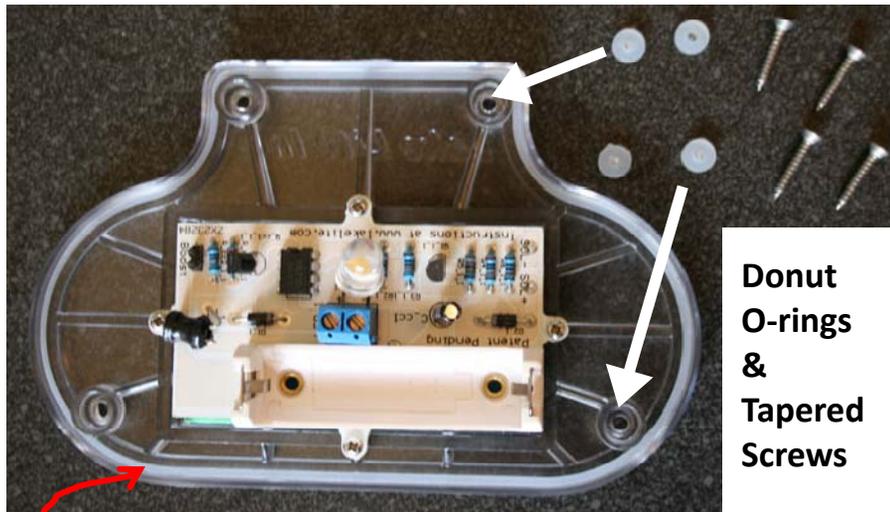

2. Ensure the Main Seal is properly in place and not twisted:

3. Be sure to use the better Tapered Head screw when closing up your EZ Dock Lite Top.



Tapered Head



Round Head

3. Use a small electric screwdriver to fully tighten ALL 4-Screws to ensure best sealing. You will notice the main seal will change from a milky white to a clear color when it is compressed fully.



4. Place the Round Plugs over the screws When you finish assembling the light.

1. These are the screws that should be inside the bag.





Tapered Head




Round Head

2. Check that the Main Seal and the 4 donut-shaped o-rings are installed.

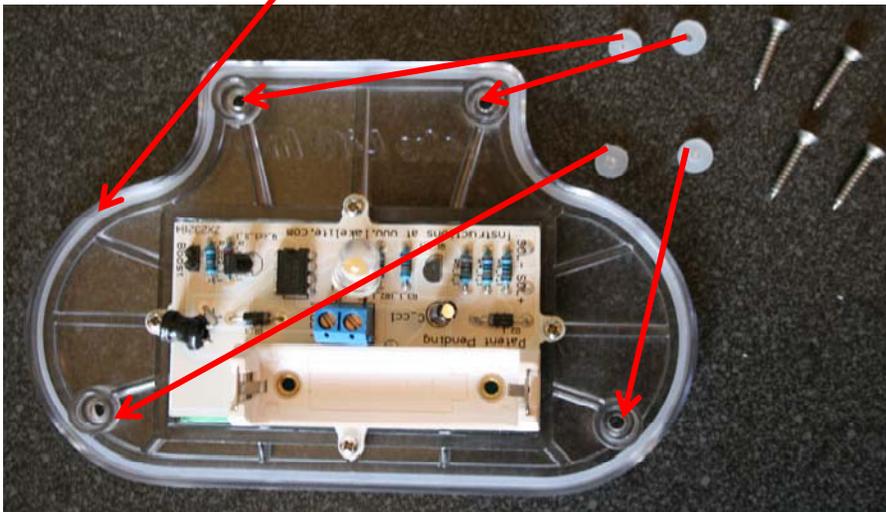


Donut O-rings


3. After you assemble your light you may then use the circle o-ring cover the screws.



Top Circle O-rings

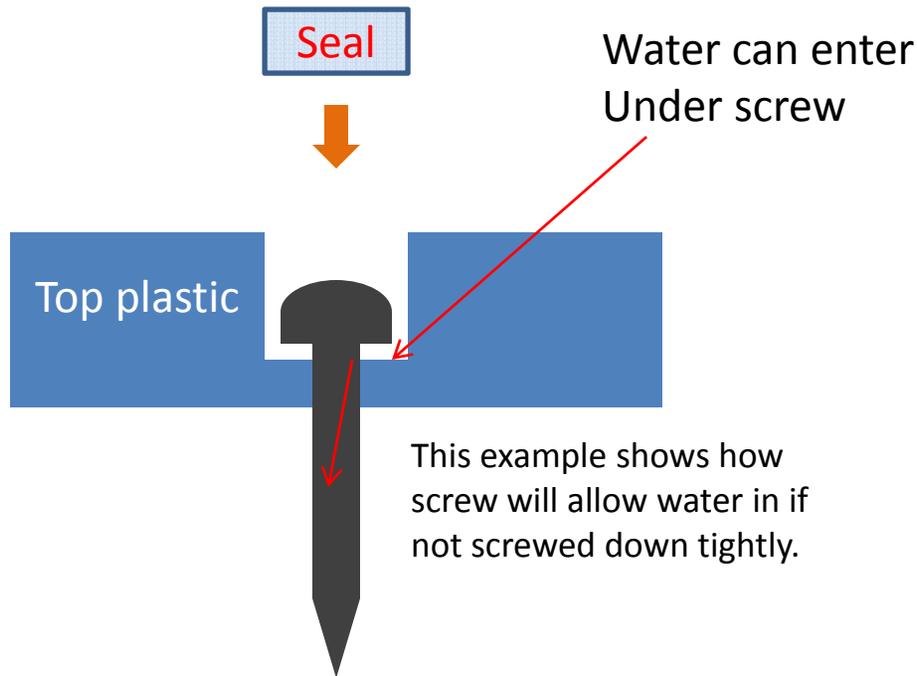

With the older style PAN head screw it is very important to use a Electric screw driver to get the screw head tightly to the housing so it creates a seal. If the screw head is not down fully, water will get under the head and slowly work its way around the threads of the screw into the light.

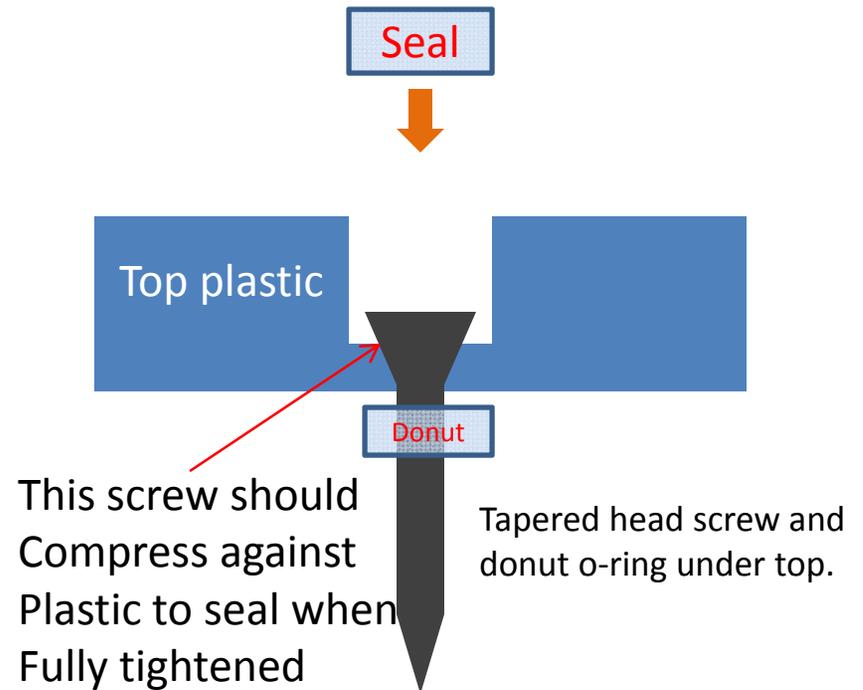

With the new tapered head the screw will tighten itself against the plastic to make a seal however it is still **IMPORTANT** to use a screw gun to make sure the screws are in tightly. Also make sure the donut shaped o-rings are under the top, this will also help protect against possible water entry.