

email a short description of your issue to sales@lakelite.com with name, address, phone number and someone will be happy to quickly assist you. No email access please call: Ph: 260-918-2758.



NOTE: There are two battery clips to securely hold the batteries in the battery holder so they do not fall out. Please don't forget to use them or throw them away. Make clips are SNAPED in place. The clip should fit tightly in the grooves.

Battery & Top Installation

1. Place battery in correct position in holder
2. Place battery clip over battery and Make sure it SNAPS in place on both sides of the battery holder.
3. Check the LED is screwed in the socket tightly and in correct position.
4. Check to make sure the Light comes on when you cover the solar panel (or try in dark room) * Note: Battery must have some charge to test. Make sure you check the unit is working properly before screwing the top on so you do not have to unscrew the lid again.
5. Check that the o-ring/Seal is in proper position around the top lid
6. Screw Top down tightly ensuring that the o-ring/seal has been drawn down tightly to make a good seal.

Mounting Instructions :

- You may place the solar light in the pocket, or if you would like, you may use a small amount of silicone glue on the bottom and then place in the pocket. We recommend Clear Silicone caulk/glue.
- **WARNING:** We recommend a removable glue such as silicone that will not damage your dock, and will allow you to remove the light from the pocket if it is damaged or you need to move it. **DO NOT** use Super Glue, Epoxy, or other non removable adhesives. **DO NOT** use adhesives that may chemically damage your dock.
- **DISCLAIMER:** Lake Lite Inc. does not take responsibility for any damage resulting from use of adhesives on your EZ Dock. If you have any questions about adhesives on your EZ Dock please contact your EZ Dock representative.

Changing LED Colors & LED Installation **Color LED's - Sold Separately**

NOTE: DO NOT worry if you accidentally plug the LED in backwards it will NOT damage anything it simply will not illuminate. Simply turn it around and reinsert into the socket if you incur this problem.



NOTE: Battery must have some charge in order to see if LED illuminates: Generally batteries come with a small amount of charge. Also LED will not illuminate if solar panel is exposed to enough light: (try in dark area)

NOTE: This operation requires a small regular screwdriver and a pair of pliers.


NOTE: There is no way to tell which color an LED is until it is illuminated.


Make sure you have the following things seen below:

Cut Longer (+) side to same length as the (-) side.

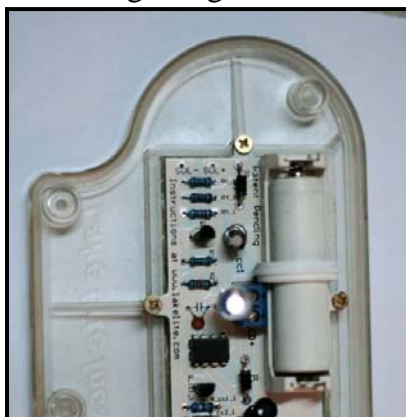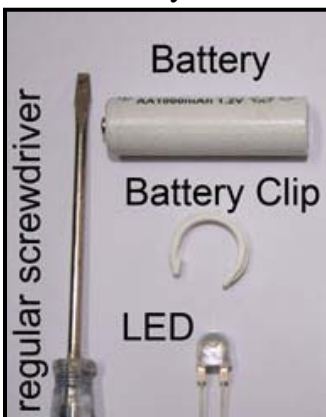

Use pliers to Bend as seen. NOTE Bend direction.

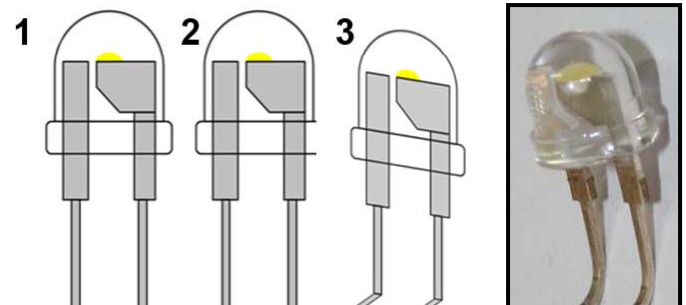

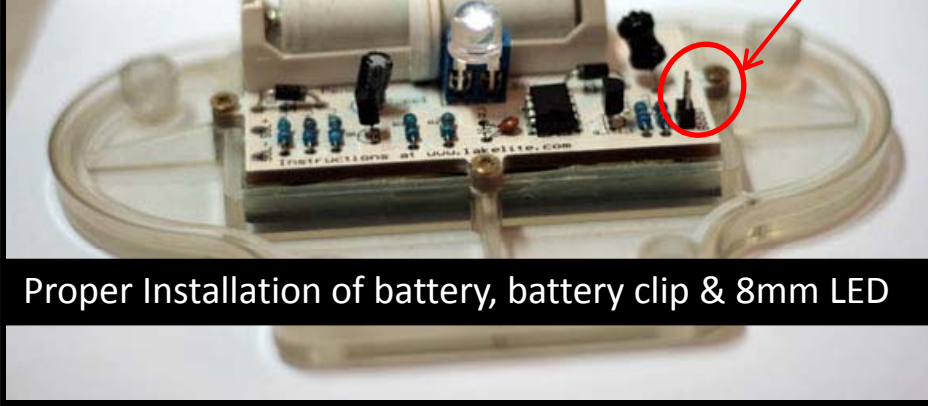

power. Run times with provided battery will be shorter: We **HIGHLY** recommend you purchase higher capacity Ni-Mh Batteries in the range of 2000-2500mA to increase run times. The solar panel is capable of charging the larger batteries: You can purchase these batteries at most stores such as Wal-Mart. You may also use higher capacity Ni-Mh batteries without the boost option for very long run times.

WARNING: Power Boost can only be used with newer (8mm) Jumbo size LED's. Power boost option will ruin our older (5mm) LED. We will discontinue our 5mm LED's shortly so when ordering color LED's for your EZ Dock Lite ask for the 8mm size, as they are much brighter.

Troubleshooting

Q: My light does not work.

1. Make sure battery is securely in place & in proper position.
2. Your LED may be installed backwards. Try reversing.

Q: I replaced my LED with a different color LED but it did not illuminate.

1. The battery must be charged and the LED must be properly installed in order for the LED to illuminate.
2. After installing the LED try placing the unit in a dark area. The light is activated and turned on by the dark.
3. FOLLOW INSTRUCTIONS AGAIN CAREFULLY!
4. You may also visit www.lakelite.com for more detailed instructions or call Lake Lite at 260-918-2758.
- 5.

Q: My light has a short run time.

1. Improper location. The light is powered by the sunlight, place light in direct sunlight.
2. Batteries may be dead, replace with new Ni-Cd or Ni-Mh batteries.
3. You may be using the BOOST option with low capacity batteries: Try purchasing Ni-Mh types of 2000-2500mA.

Q: My light is very dim.

1. LED may have poor connection in socket: Check connection: (in a very rare instance the LED may be faulty, please contact us)
2. Batteries may be dead, replace with new Ni-Cd or Ni-Mh batteries. – This is the most common reason.
3. Dock Lite is in a shaded area and is not receiving full sunlight throughout the day. Place in sunny area not shaded by objects.



IMPORTANT: For best performance, replace with rechargeable AA Ni-Cd or Ni-Mh batteries every 2 seasons of use!

Storage Tips (Winter)

Extreme winter weather can reduce the life expectancy of your Solar Dock Lite

1. Cold weather can dramatically reduce the life expectancy of your rechargeable Ni-Cd or Ni-Mh battery.
2. Store your Solar Dock Lite inside during cold months when your dock is not in use
3. If you have glued your Solar Dock Lite base unit to your Brock post you may simply remove the Solar Top (Electronics Portion) and store inside if you don't plan to store you Brock posts inside.

Disclaimer

EZ DOCK is a registered trademark of E-Z Dock, Inc. Lake Lite, Inc. and this product are not sponsored by, endorsed by, or affiliated with E-Z Dock, Inc. in any way.

CAUTION: CONTAINS NICKEL-CADMIUM BATTERIES. BATTERY MUST BE RECYCLED OR DISPOSED OF PROPERLY.

Owner Registration Card

Please fill out and affix proper postage and return this owner registration card **within 10 days** to insure that your new Solar Dock Lite for EZ Dock is covered by the limited warranty.

Purchaser's Name _____

Address _____

State _____ Zip _____

Purchase Date: _____ Number of Lights: _____

Where Purchased (Store Name): _____

Model No. SDL-C
UPC No. 094922533210

Lake Lite Inc. 1-Year Limited Warranty

The retailer warrants the Solar Dock Lite to be free from defects in workmanship and material present at time of shipment from the factory for a period of one year after the date of purchase by the original purchaser. We agree to correct such defects without charge or at our option replace with a comparable or superior model if the product is returned to the retailer. To obtain warranty service, you must present a copy of the receipt as proof of purchase. All costs of removing and reinstalling the product are your responsibility. Damage to any part such as by accident or misuse or improper installation or by affixing any accessories, is not covered by this warranty. There is no other express warranty. The retailer hereby disclaims any and all warranties, including but not limited to, those of merchantability and fitness for a particular purpose to the extent permitted by law. The duration of any implied warranty, which cannot be disclaimed, is limited to the time period as specified in the express warranty. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you. The retailer shall not be liable for incidental, consequential, or special damages arising out of or in connection with product use or performance except as may otherwise be accorded by law. Some states do not allow the exclusion of incidental or consequential damage, so the above exclusion or